



COMAX

wall formwork


▼ Panels size

Standard Panels

Width (cm): 240/120/100/75/60/50/40/30/20
Height (cm): 330*/300/270*/150/75

Universal Column/Panels

Width (cm): 120/90
Height (cm): 300/150/75

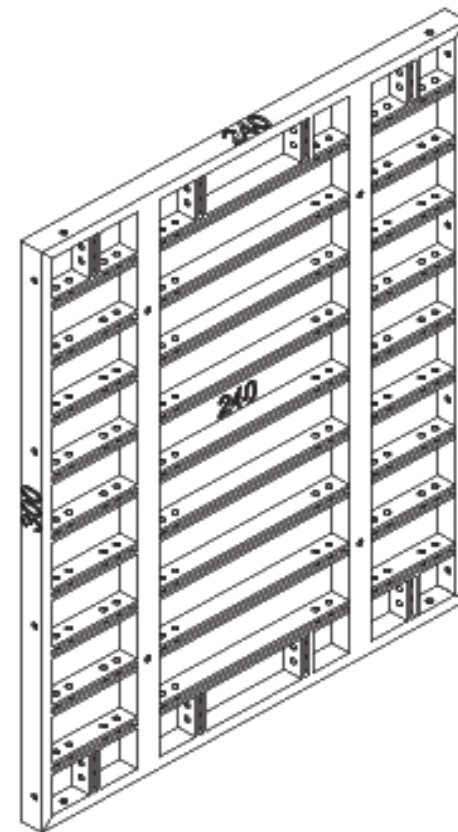

▼ Profile thickness

Height= 120mm
Thickness= 60mm
Weight= 5.39Kg/m

▼ Steel type

External steel profile

S 355-MC (high yield strength steel for cold forming according to EN10149-92).

Internal steel profiles

S 235-JR

▼ Maximum casting pressure: 80kN/m²

Fresh concrete casting pressure according to DIN 18218 complying with the flatness tolerances according to DIN 18202 (table 3 line 7).

▼ Plywood

Thickness= 18mm - 12,6 Kg/sq.m.
Multilayer Finnish panel with a 220/220 g/sq.m. phenolic coating.

▼ LongLife plywood

Thickness= 18mm - 15,0 Kg/sq.m.
Birch plywood panel with woodplastic composite (polyolefin) coating.

▼ Connection Clamps (vertical/horizontal)

Cod. 19030 Fixed Clamp
Cod. 19080 Adjustable clamp (max 7cm)
Cod. 19061 Adjustable clamp (max 20cm)

▼ Tie rods

DW15 and DW20 - n.2 tie rods.

▼ Service brackets

Brackets cm 75
Working load 150Kg/sq.m. for centre distance 1.50m

▼ Lifting Hook

Cod. 11571
Maximum load capacity 1500 Kg.

CONDOR

www.condorspa.com