



O-ROUND

wall formwork


▼ Panels size

External Panels

Width (cm): 120/ 225
Height (cm): 300/ 150

Internal Panels

Width (cm): 115/ 215
Height (cm): 300/ 15

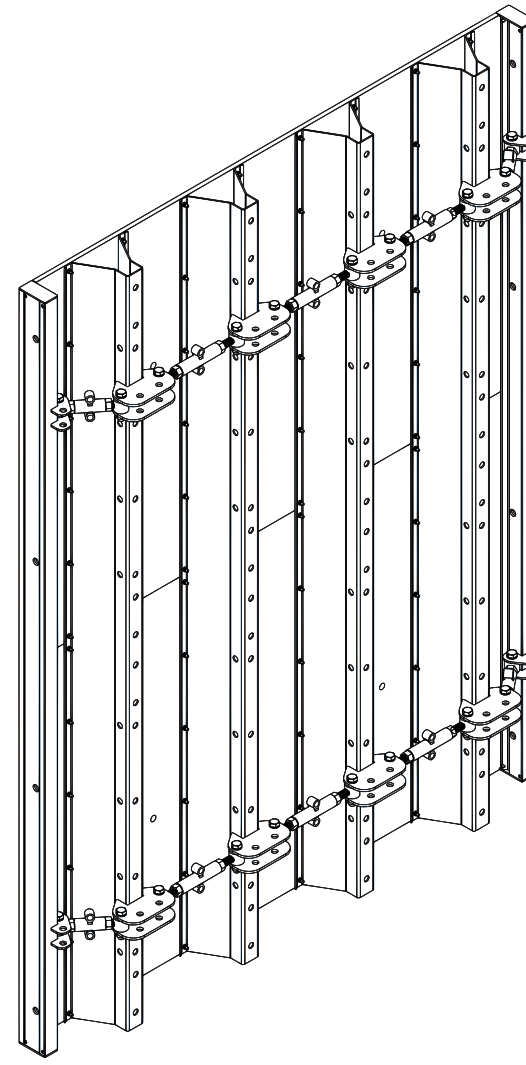

▼ Profile thickness

Height= 120mm
Width= 60mm

▼ Steel type

External steel profile

S 355-MC (high yield strength steel for cold forming according to EN10149-92).

▼ Casting pressure: 60 kN/m²

Fresh concrete casting pressure according to DIN 18218 complying with the flatness tolerances according to DIN 18202 (table 3 line 7).

▼ Tie rods

DW15 and DW20 - n.4 tie rods

▼ Plywood

Thickness= 18mm - 12,6 Kg/m²
Multilayer Finnish panel with a 220/220 g/sq.m. phenolic coating.

▼ Service brackets

Brackets cm 75
Working load 150Kg/sq.m. for centre distance 1.50m

▼ Connection Clamps (vertical/horizontal)

Cod. 19030 Fixed Clamp
Cod. 19080 Adjustable clamp (max 7cm)
Cod. 19061 Adjustable clamp (max 20cm)

▼ Lifting Hook

Cod. 25230
Maximum load capacity 1500 Kg.

CONDOR

www.condorspa.com