
ADATTO ALU

Wall Formwork

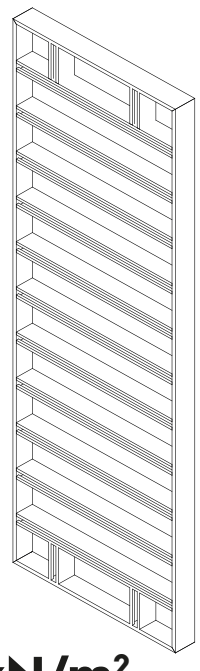

PANELS SIZE

Standard Panels
Width (cm): 100/75/60/50/40/30/20
Height (cm):300/270/150/75

Universal Column/Panels
Width (cm): 100/75
Height (cm):300/270/150/75

Maximum casting pressure: 60 kN/m²

Fresh concrete casting pressure according to DIN 18218 complying with the flatness tolerances according to DIN 18202 (table 3 line 7).

Plywood

Thickness= 18mm – 12,6 Kg/m2
Multilayer Finnish panel with a 220/220 g/sq.m. phenolic coating 220/220 g/m2.

CONNECTION CLAMPS

Cod. 19031 Fixed Clamp
Cod. 19080 Adjustable clamp (max 13cm)
Cod. 19061 Adjustable clamp (max 26cm)

FLATNESS TOLERANCE

According to DIN 18202 (table 3 line 7).

Profile thickness

Height= 120mm
Thickness= 20mm

PANELS WEIGHT

Panels of 23 Kg/sqm.

TIE RODS

DW15 - n.3 tie rods

SERVICE BRACKETS

Brackets cm 75
Working load 150Kg/sq.m. for centre

LIFTING HOOK

Cod. 19100
Maximum load capacity 1500 Kg.

ALUMINIUM FRAME

Perimeter frame with central crosspieces entirely in aluminium.

CONDOR
CONDORSPA.COM