COMAX

Stripping corner

COMPONENTS:

The system consists of the following components:

1. Fixed part
2. Moving part
3. Central vertical tube
4. Hinge

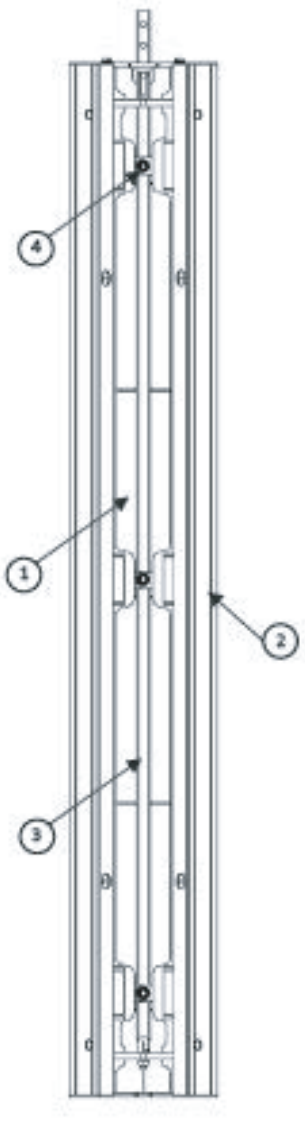

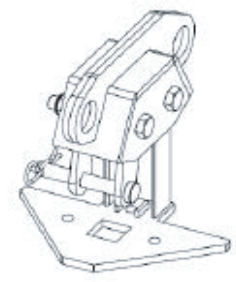

Striking head

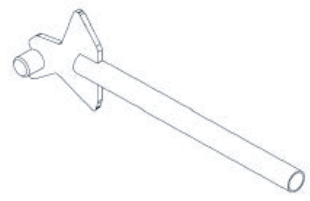

Striking lever

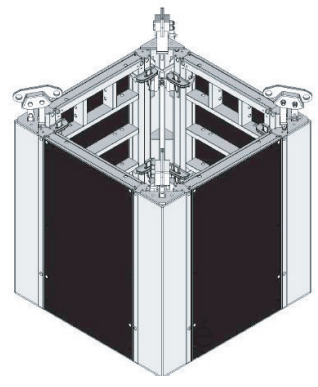

Closed shaft

FEATURES:

- Available in 4 heights: 150, 270,300,330cm
- Max. load capacity 80 KN/m²

OPERATION:

•The corner can be operated by hand: by means of the striking lever (Procedure 1);

•The corner can be operatedn with the aid of a crane: by means of chains attached to the striking head (Procedure 2).

1

Opening-closing corner by striking bar

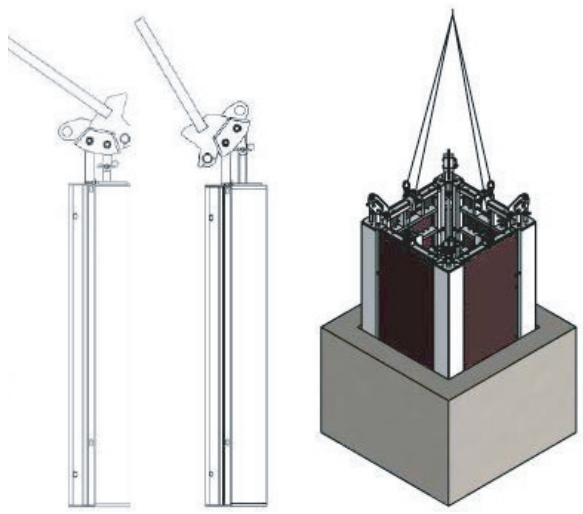

2

Extraction from the shaft by lifting hook

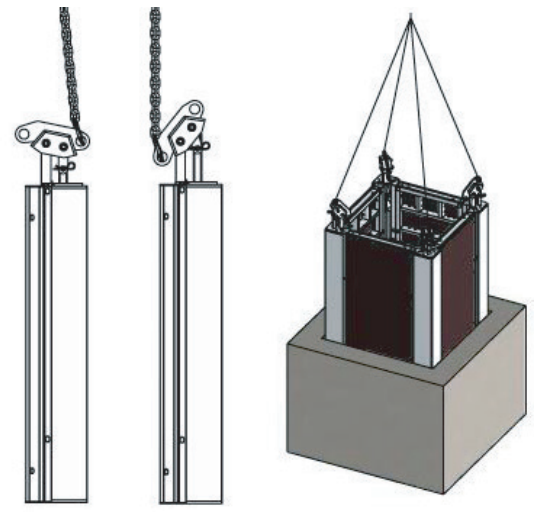

CONDOR

CONDORSPA.COM