



# POSTIS ECO


*Props for slab*

POSTIS ECO prop is easy to handle and it has a minimum capacity of 20 kN according to EN1065. Available in two sizes (300 and 350) it allows to work on different heights from 1.80m to 3.50m. The threading of the external pre galvanized tube is made by mechanical rolling.

System characteristics:

- Anti-crush system of the hand
- Shaped hook
- Anti-slip system for the inner tube

| Dati Tecnici / Technical Data / Données techniques                                |                                |
|---|--------------------------------|
| Filettatura / Thread / Filetage   | Scoperta / External / Apparent |
| Diametro tubo esterno / External tube diameter / Diamètre du fut extérieur (mm)   | 60                             |
| Diametro tubo interno / Internal tube diameter / Diamètre du tube coulissant (mm) | 48                             |
| Dimensioni Piastre / Head base plates / Dimensions platines (mm)                  | 120x120x6                      |
| Diametro gancio / Pin diameter / Diamètre broche (mm)                             | 16                             |

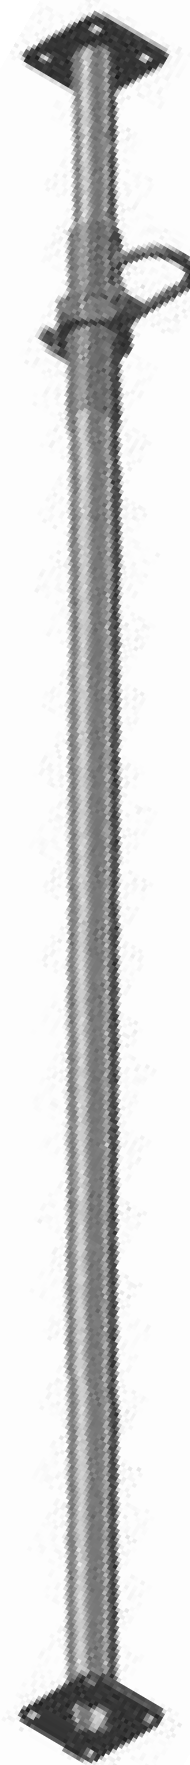

|          | POSTIS ECO 300       | POSTIS ECO 350 |
|----------|----------------------|----------------|
| Lmin [m] | 1,80                 | 2,00           |
| Lmax [m] | 3,00                 | 3,50           |
| H [m]    | <b>LOAD CAPACITY</b> |                |
|          | [kN]                 | [kN]           |
| 1,80     | 35,0                 | 34,0           |
| 1,90     |                      |                |
| 2,00     |                      |                |
| 2,10     |                      |                |
| 2,20     | 34,0                 | 34,0           |
| 2,30     |                      |                |
| 2,40     | 31,3                 |                |
| 2,50     | 28,8                 | 32,6           |
| 2,60     | 26,6                 | 30,2           |
| 2,70     | 24,7                 | 27,9           |
| 2,80     | 23,0                 | 25,8           |
| 2,90     | 21,4                 | 24,2           |
| 3,00     | 20,0                 | 22,5           |
| 3,10     |                      | 21,2           |
| 3,20     |                      | 20,5           |
| 3,30     |                      | 20,0           |
| 3,40     |                      |                |
| 3,50     |                      |                |

# CONDOR

[www.condorspa.com](http://www.condorspa.com)